17.1 Coaches Box



Suitable Locations • Sporting Reserves

Common Locations • Glen Park & Fred Geale Ovals

Dimensions • 1600x3200x2540 approx. (above ground).

Material • 150mm Thick 25MPa concrete pad.

• Steel shelter with Colorbond roof (green). Steel slat bench is 475mm

above concrete pad.

Installation Installation Detail.

• Attach base plates of shelter onto concrete pad with M12 chemset anchors. Tack weld fixings discretely as required to increase theft and

vandalism resistance.

• Anti-graffiti coating can be applied, refer to 10.1 Anti Graffiti.


Maintenance • Clean as required.


Product & Supplier BSH-104 Coach Box by Urban Renewal Street Furniture or Alltek

Welding.



17.1 Coaches Box

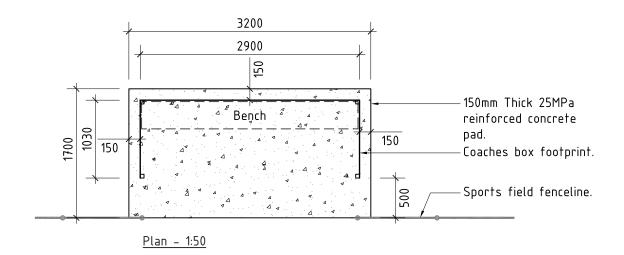

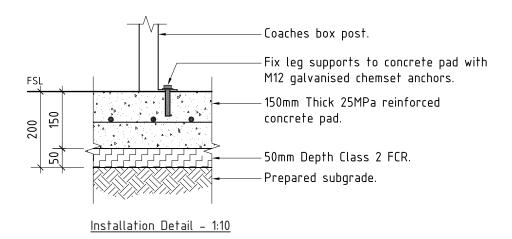







Suitable Locations

- Significant Parks & Gardens.
- Sporting Reserves

Common Locations

• Grayswood Reserve, Evelyn Road Reserve & Ainslie Park.

Dimensions

- •Ring: 3050mm high above ground.
- ■Backboard: 1800mm wide x 1050mm high. (Standard)
- Tower post: 115 dia. with 1.2m/1.8m outreach to backboard depending on run off space.
- Concrete pad: 5x10m (Basketball/Netall Tower) or 5x7.5m (Basketball only). Refer to installation details and notes.

Material

- •Hot dipped galvanised steel tower and sleeve.
- •Powder coated rings, no net.
- Fibreglass backboard (non-standard).

Installation

- Encase steel sleeve in concrete footing. Ensure sleeve is set plumb.
- •Slip ring and sleeves must be fitted prior to attaching tower to sleeve.
- •Install concrete pad as shown in Installation Detail.


Maintenance

•Clean as required.

Product & Supplier

- Basketball Tower (24222 with 1.2m/1.8m outreach) by Truline.
- Basketball/ Netball Tower (24234 with 1.2m/1.8m outreach) by Truline.
- Ground sleeve (24223) by Truline.




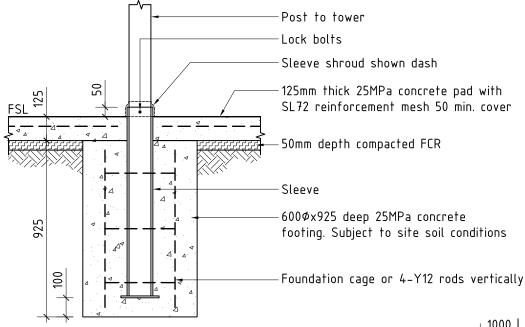


<u>Installation Detail - Section 1:20</u>

Concrete Pad Notes:

- Unless otherwise noted concrete colour for pad construction is to be grey cement. Cement shall comply with AS 1315
- No construction joints are required within pad (sawcuts only). 1:50 cross fall shall be integrated into pad construction.
- Unless otherwise noted, the pad surface is to have a 'broomed' finish.
- N.B. On days of high temperature, measures must be put in place to ensure that the concrete doesn't dry too quickly.



New Tower To Existing Court Plan 1:100

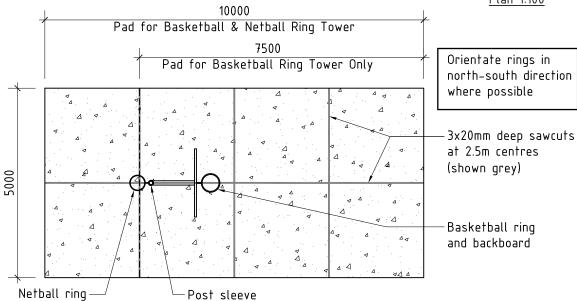

Concrete Pad - Plan 1:100

