



NOTES :

- STEP IRONS TO BE GALVANISED AND USED IN PITS EXCEEDING 1m IN DEPTH.
- COMMENCE STEP IRONS 450mm FROM BOTTOM OF PIT WITH MAXIMUM 300mm SPACING TO WITHIN 300mm OF THE TOP.
- STEP IRONS TO BE PLACED CENTRAL TO PIT COVER OPENING.
- STEP IRONS INSTALLED IN COUNCIL PITS MUST COMPLY WITH STANDARDS: AS3679 PART 1 AS/NZS 4680
- AND FOR PRECAST PITS STEP IRONS MUST BE LOAD TESTED TO AS4198/1994

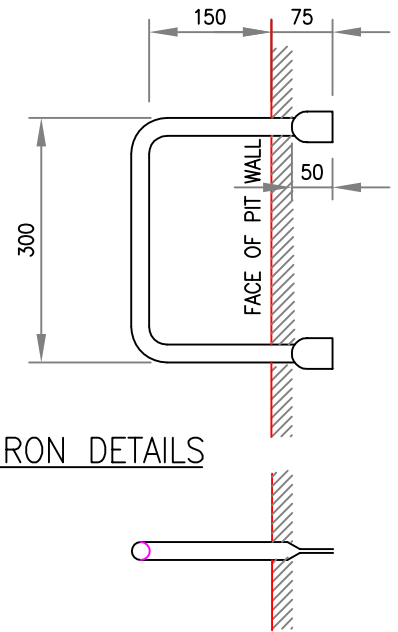

STEP IRON DETAILS

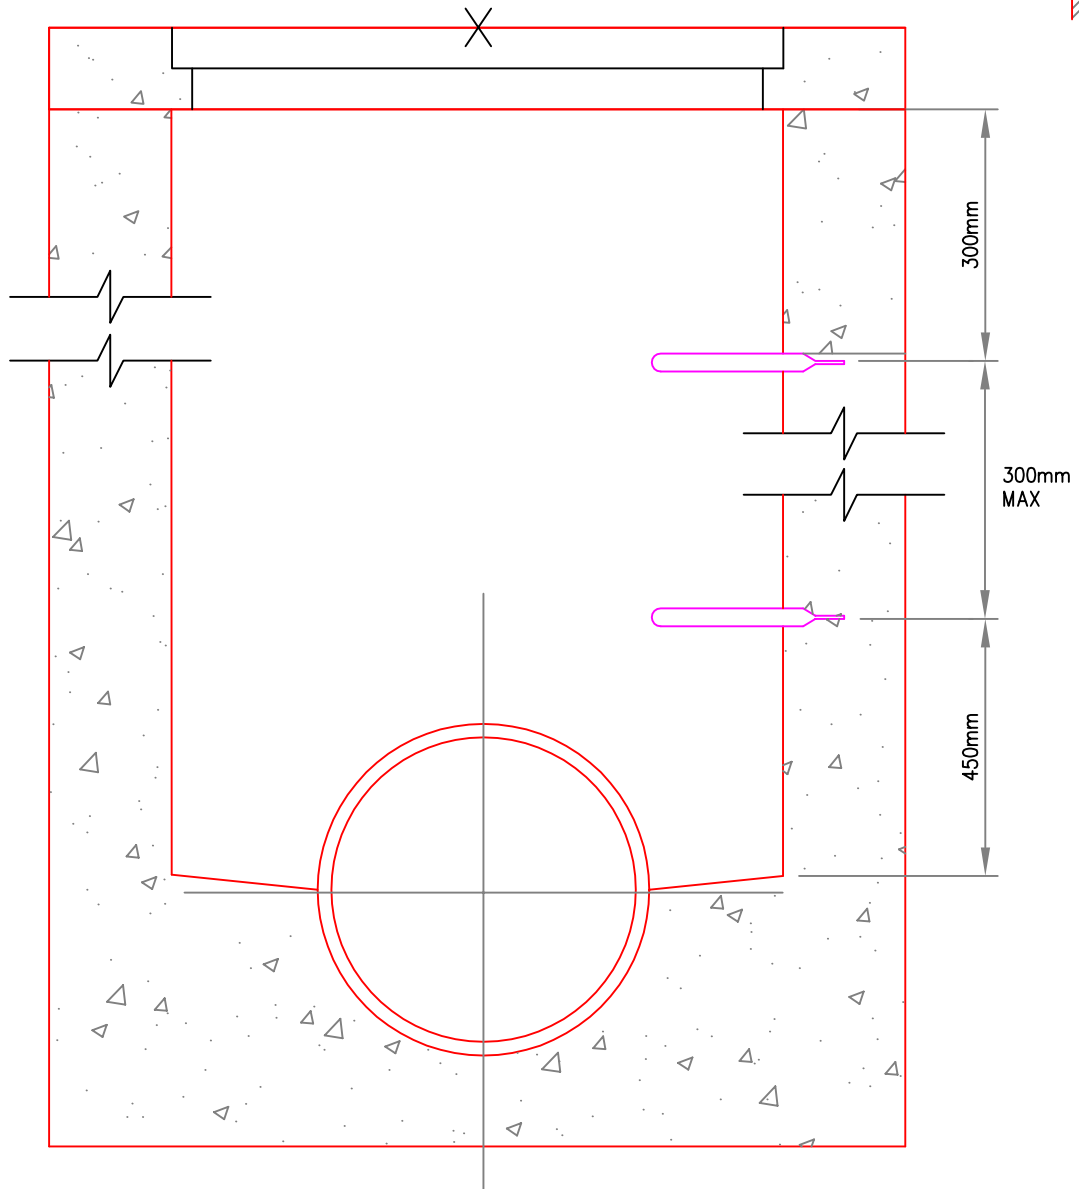

TITLE:

STEP IRON DETAIL

APPROVED: A.TAYLOR

REV | D |

DATE: OCTOBER 2011

DRAWING No.:

SD-D09

SHEET : 1 of 1

DESIGNED: D. RUFFLE

CHECKED: D. HAIR