
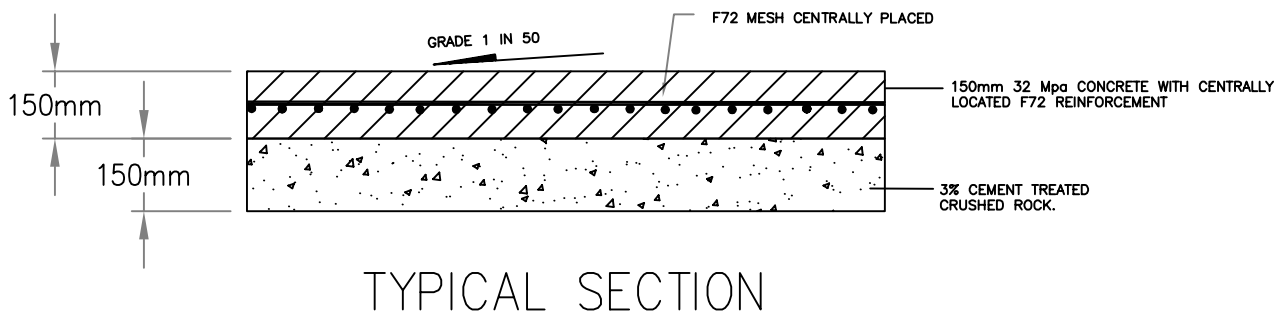


NOTES:

- EXPANSION MATERIAL INSTALLED IN EXPANSION JOINTS TO BE APPROXIMATELY AT 10M INTERVALS AND AT START AND END OF NEWLY LAID FOOTPATH SECTIONS.
- CONSTRUCTION JOINTS TO BE INSTALLED AT 2.5m INTERVALS.
- WHERE CROSSOVERS ARE CONSTRUCTED FOOTPATH MUST BE THICKENED IN ACCORDANCE WITH SD-(H01-H04).
- FOOTPATH TO BE STIPPLE FINISH WITH NO HIGHLIGHTS.

PANEL LENGTHS FOR CONSTRUCTION JOINTS			
	PATH WIDTH (M)		
	LOCAL ACCESS PATH	COMMUTER PATH	RECREATIONAL PATH
DESIRABLE	2.5	2.5	3.5
ACCEPTABLE RANGE	2.0-2.5	2.0-3.5	3.0-4.0

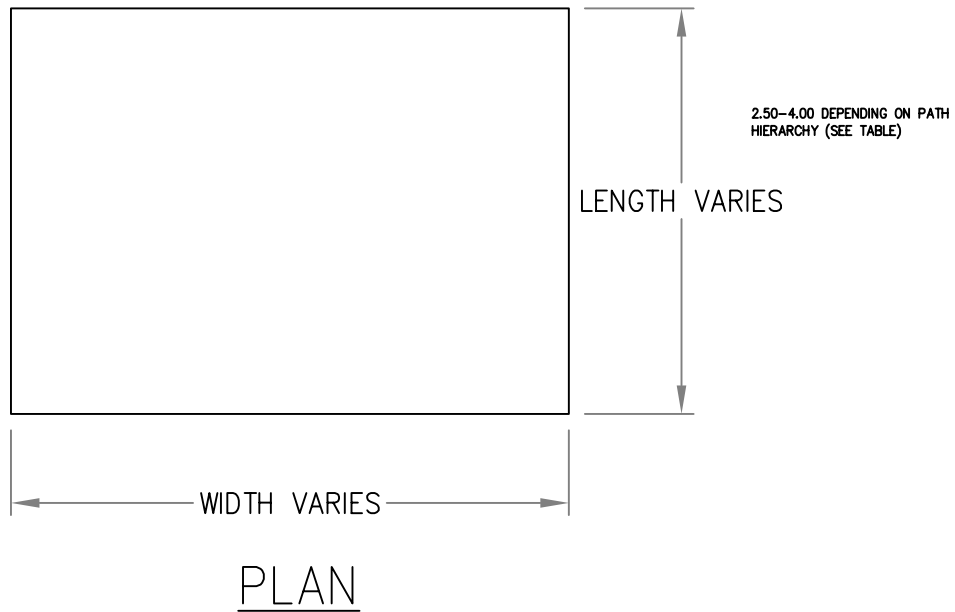

TITLE:
**SHARED PATH
 DETAILS CONCRETE**

APPROVED: A.TAYLOR	
REV	D
DATE: OCTOBER 2011	
DRAWING No.:	
SD-F03	
SHEET : 1 of 1	