

NOTES:

1. DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE INDICATED.
2. STANDARD TO BE USED WHERE STORMWATER DRAINAGE PIPE CANNOT BE CONSTRUCTED WITHIN NATURE STRIP & PIT ACCESS MUST BE WITHIN THE ROADWAY.
3. STANDARD TO BE USED FOR PITS UP TO 1.20m DEPTH. FOR PITS DEEPER THAN 1.20m, REFER TO MAROONDAH CITY COUNCIL STANDARD DRAWING MCC-209 & MCC-211.
4. REFER TO SHEET 2 FOR ADDITIONAL PIT CONSTRUCTION NOTES.




Engineering & Building Services
Ph: (03) 9298 4292
www.maroondah.vic.gov.au

Title:

DRAINAGE - GRATED SIDE ENTRY PIT - DRAINAGE PIPE WITHIN ROADWAY

Revision: 02
Date: June 2021
Sheet: 1 of 2
Standard Drawing Number:
MCC-207

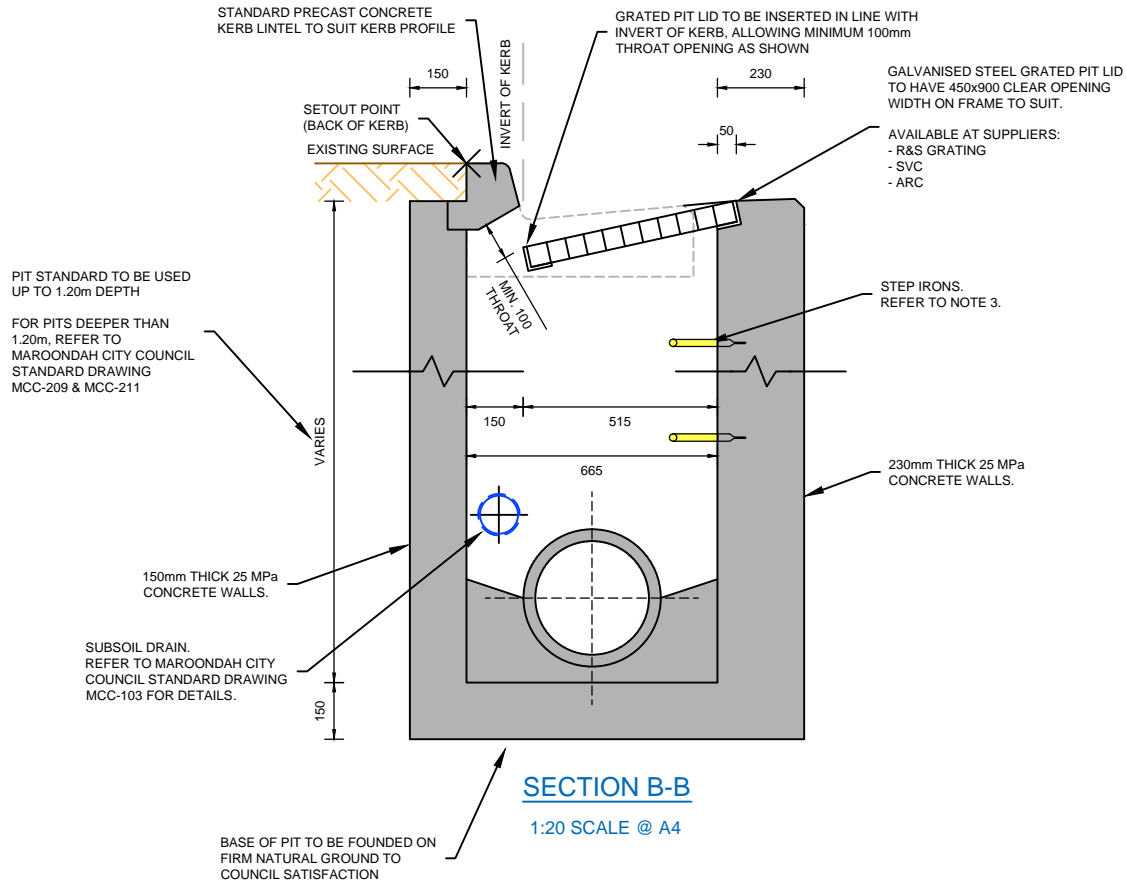

NOTES:

1. DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE INDICATED.
2. NO INTERNAL DIMENSION OF GRATED PIT SHALL BE LESS THAN PIPE DIAMETER PLUS 150mm.
3. WHERE PIT DEPTH EXCEEDS 1000mm, STEP IRONS ARE TO BE INSTALLED IN ACCORDANCE WITH MAROONDAH CITY COUNCIL STANDARD DRAWING MCC-202.
4. GRATED PIT LID IS TO BE MINIMUM CLASS D, HEAVY DUTY & BICYCLE SAFE, IN ACCORDANCE WITH AUSTRALIAN STANDARDS AS 3996:2019, INSTALLED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.



Engineering & Building Services
Ph: (03) 9298 4292
www.maroondah.vic.gov.au

Title:

DRAINAGE - GRATED SIDE ENTRY PIT - DRAINAGE PIPE WITHIN ROADWAY

Revision: 02
Date: June 2021
Sheet: 2 of 2
Standard Drawing Number:
MCC-207