


Engineering & Building Services Ph: (03) 9298 4292 www.maroondah.vic.gov.au

DRAINAGE PIPE WITHIN NATURE **STRIP**

Standard Drawing Number: MCC-204

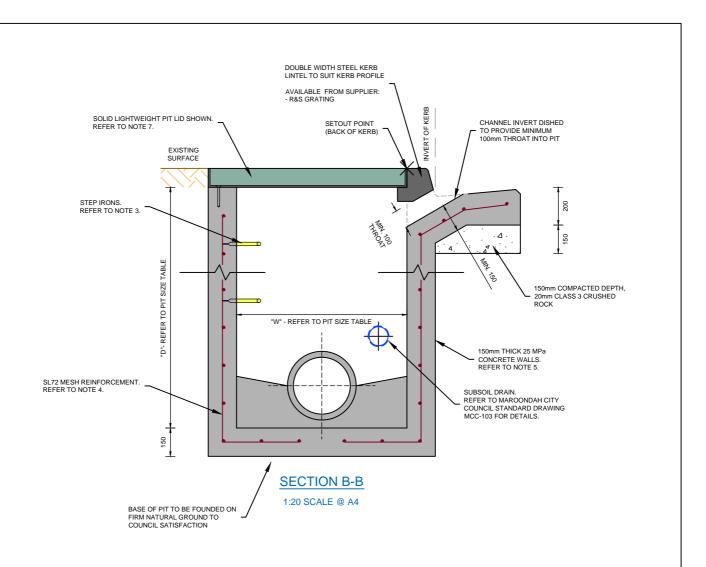

NOTES

- 1. DIMENSIONS IN MILLIMETRES UNLESS OTHERWISE INDICATED.
- NO INTERNAL DIMENSION OF JUNCTION PITS SHALL BE LESS THAN PIPE DIAMETER PLUS 150mm.
- WHERE PIT DEPTH EXCEEDS 1000mm, STEP IRONS ARE TO BE INSTALLED IN ACCORDANCE WITH MAROONDAH CITY COUNCIL STANDARD DRAWING MCC-202.
- WHERE PIT DEPTH EXCEEDS 1500mm, PIT WALLS ARE TO BE REINFORCED WITH SL72 MESH CENTRALLY PLACED.
- WHERE PIT DEPTH EXCEEDS 1800mm AND/OR PIPE DIAMETER EXCEEDS 450mm, PIT WALLS ARE TO BE 200mm THICK CONCRETE.
- WHERE PIT DEPTH EXCEEDS 3600mm, PIT IS TO BE DESIGNED IN ACCORDANCE WITH VICROADS STANDARD DRAWING SD 1011.
- SOLID LIGHTWEIGHT PIT LID IS TO BE MINIMUM CLASS B & LOCKABLE IN ACCORDANCE WITH AUSTRALIAN STANDARDS AS 3996:2019, INSTALLED IN ACCORDANCE WITH MANUFACTURER'S SPECIFICATIONS.
- CLASS 3 CRUSHED ROCK MAY CONTAIN 100% CRUSHED CONCRETE IN ACCORDANCE WITH VICROADS TECHNICAL NOTE TN 107 - USE OF RECYCLED MATERIALS IN ROAD PAVEMENTS.

	II.	INTERNAL DIMENSIONS OF PIT (mm)			
PIPE SIZE (mm)	D	L	W	STEP IRON	PIT COVER SIZE
LESS THAN 450 DIA	<1000	900	600	NO	TO SUIT
	>1000	900	900	YES	
GREATER THAN 450 DIA	<1000	900	DIA + 150	NO	
	>1000	900	900 (OR DIA + 150, IF DIA > 750)	YES	

^{*} REFER TO NOTES FOR ADDITIONAL PIT SPECIFICATIONS

MINIMUM INTERNAL PIT SIZE TABLE



Engineering & Building Services Ph: (03) 9298 4292 www.maroondah.vic.gov.au Title

DRAINAGE -DOUBLE SIDE ENTRY PIT DRAINAGE PIPE WITHIN NATURE STRIP Revision: 00

Date: October 2020

Sheet: 2 of 2

Standard Drawing Number:

MCC-204